

FIG. 1

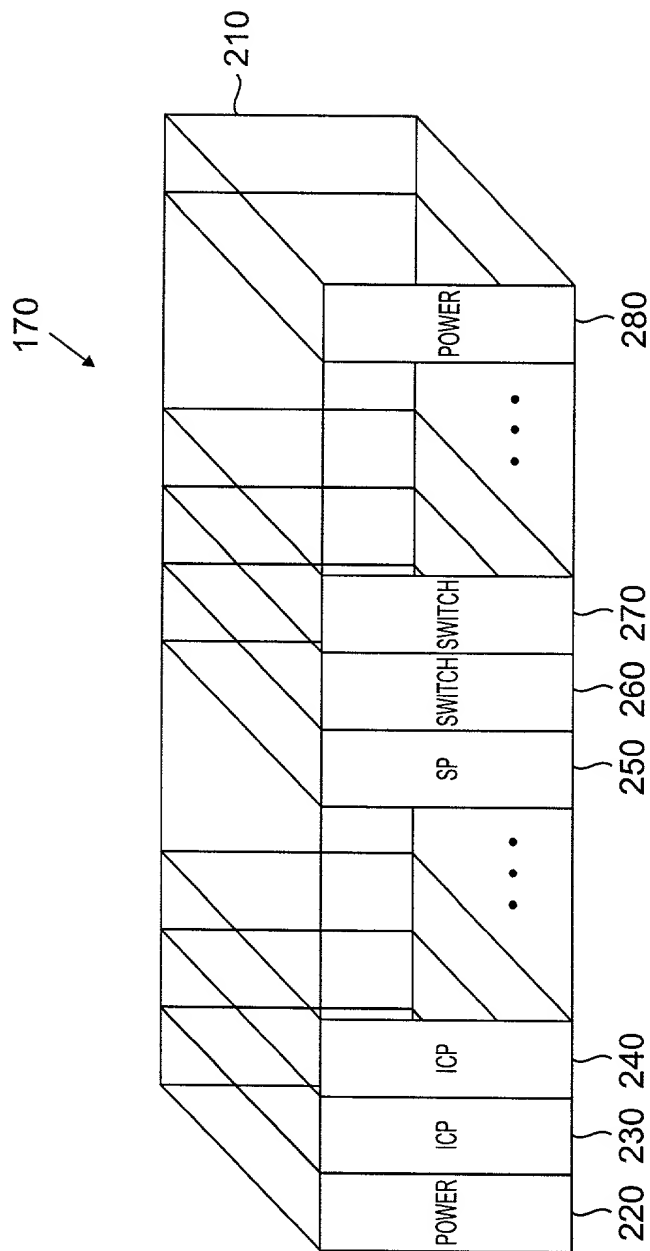


FIG. 2

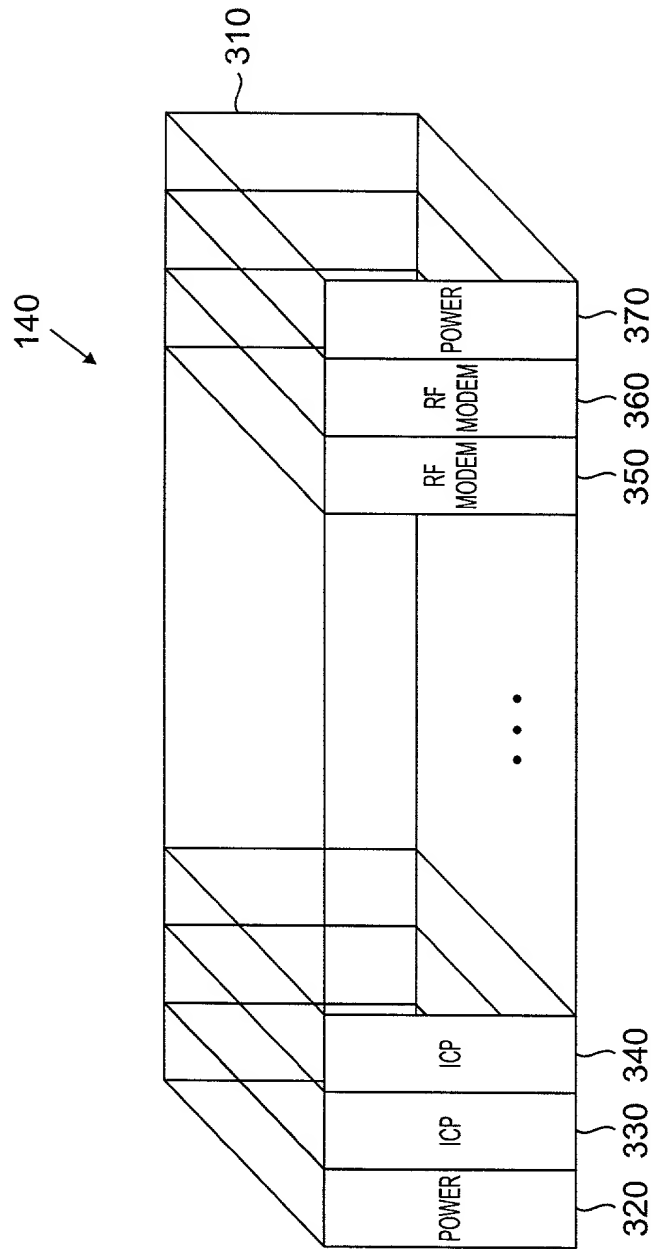


FIG. 3

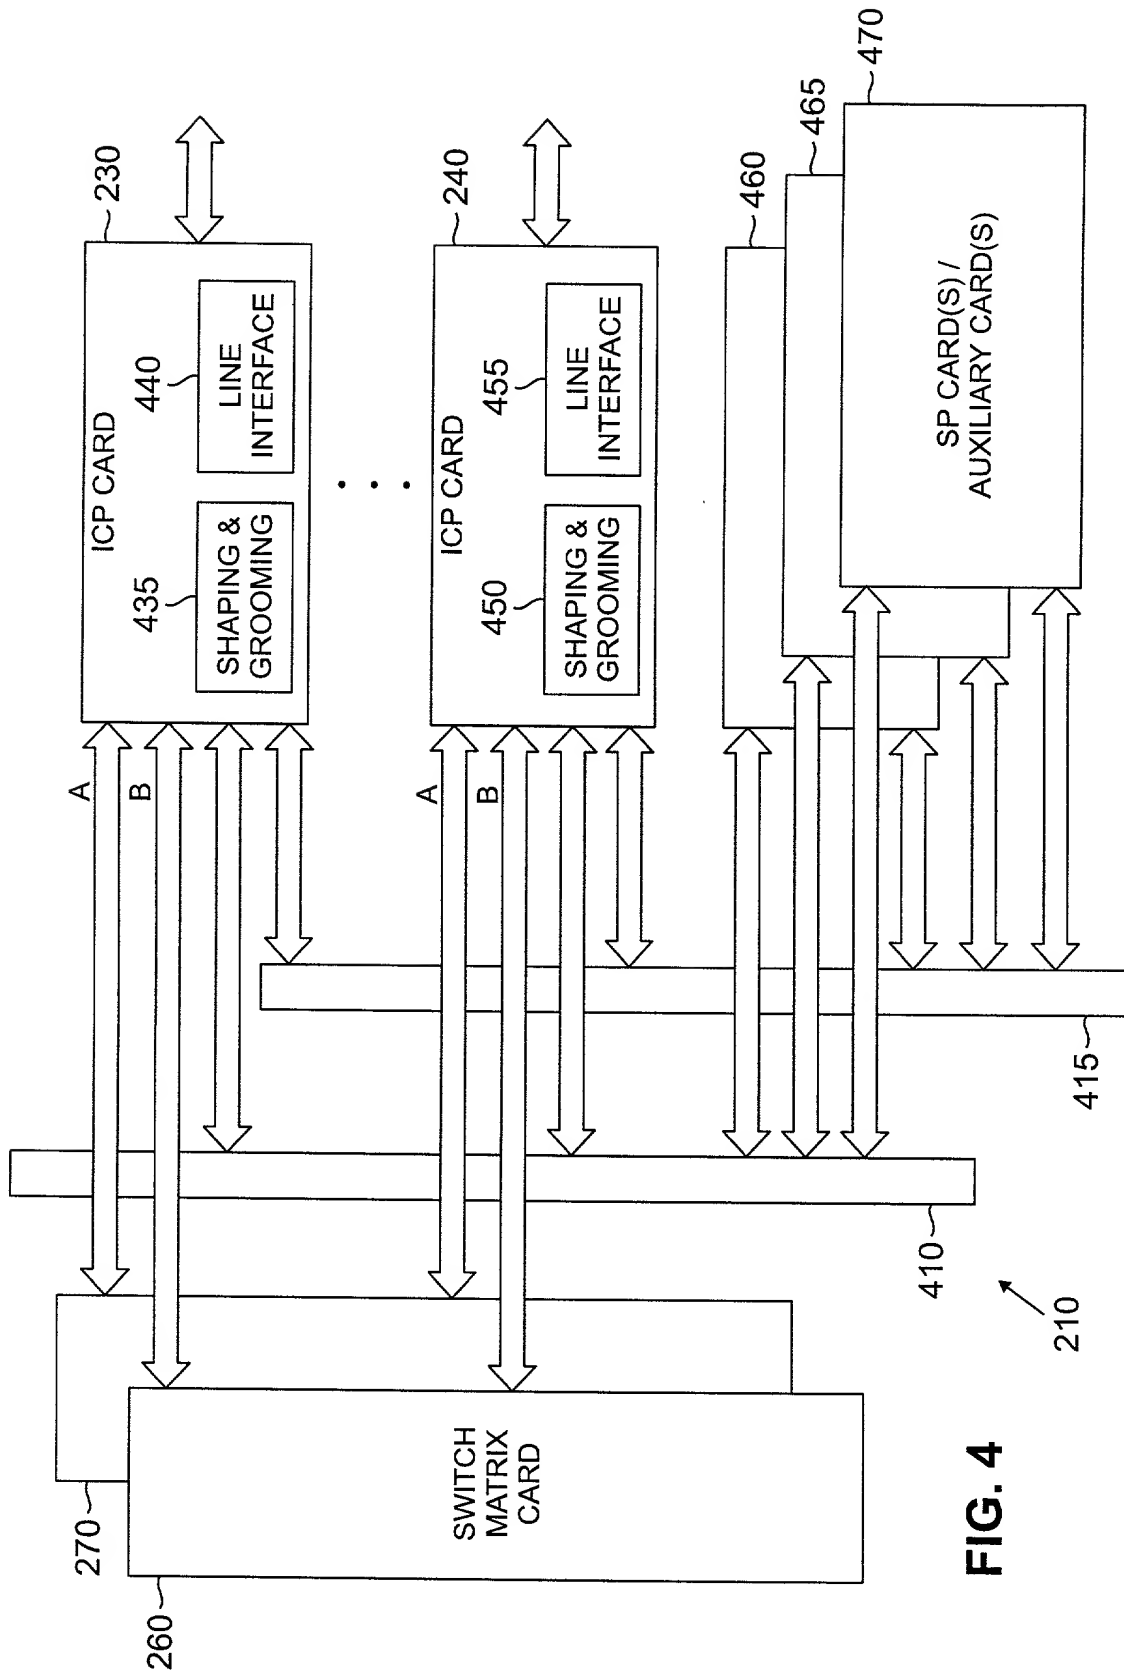


FIG. 4

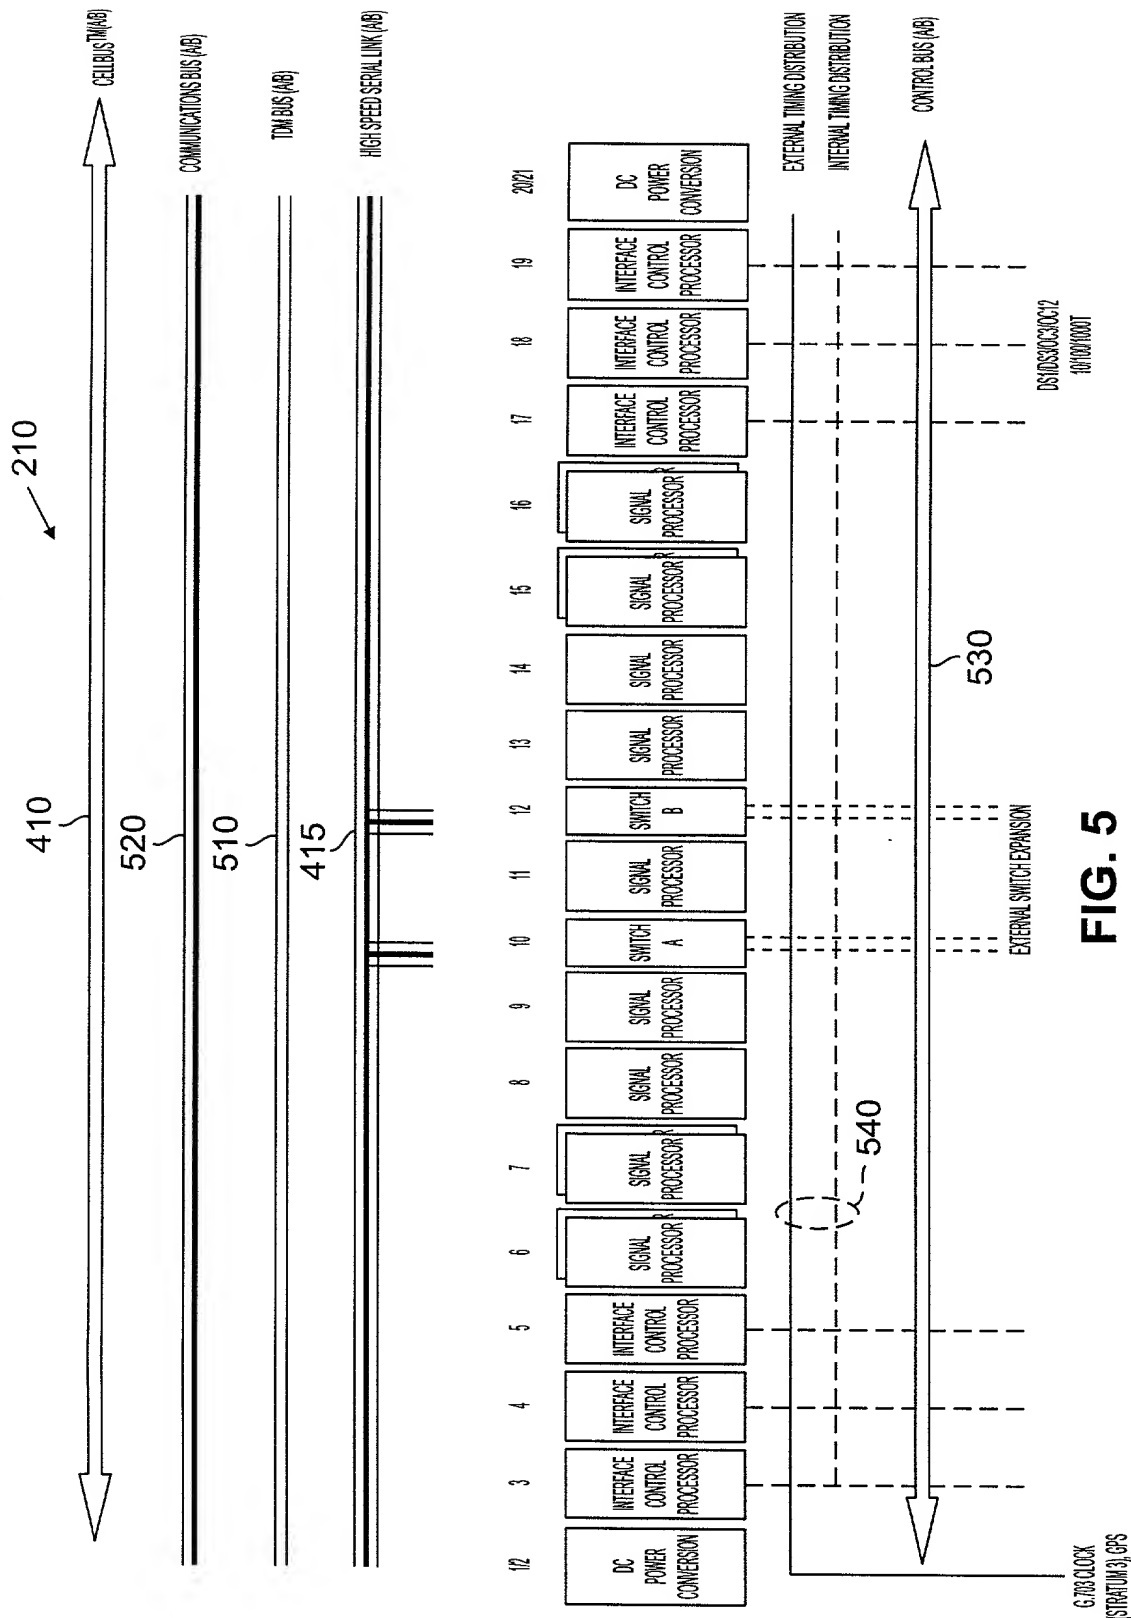


FIG. 5

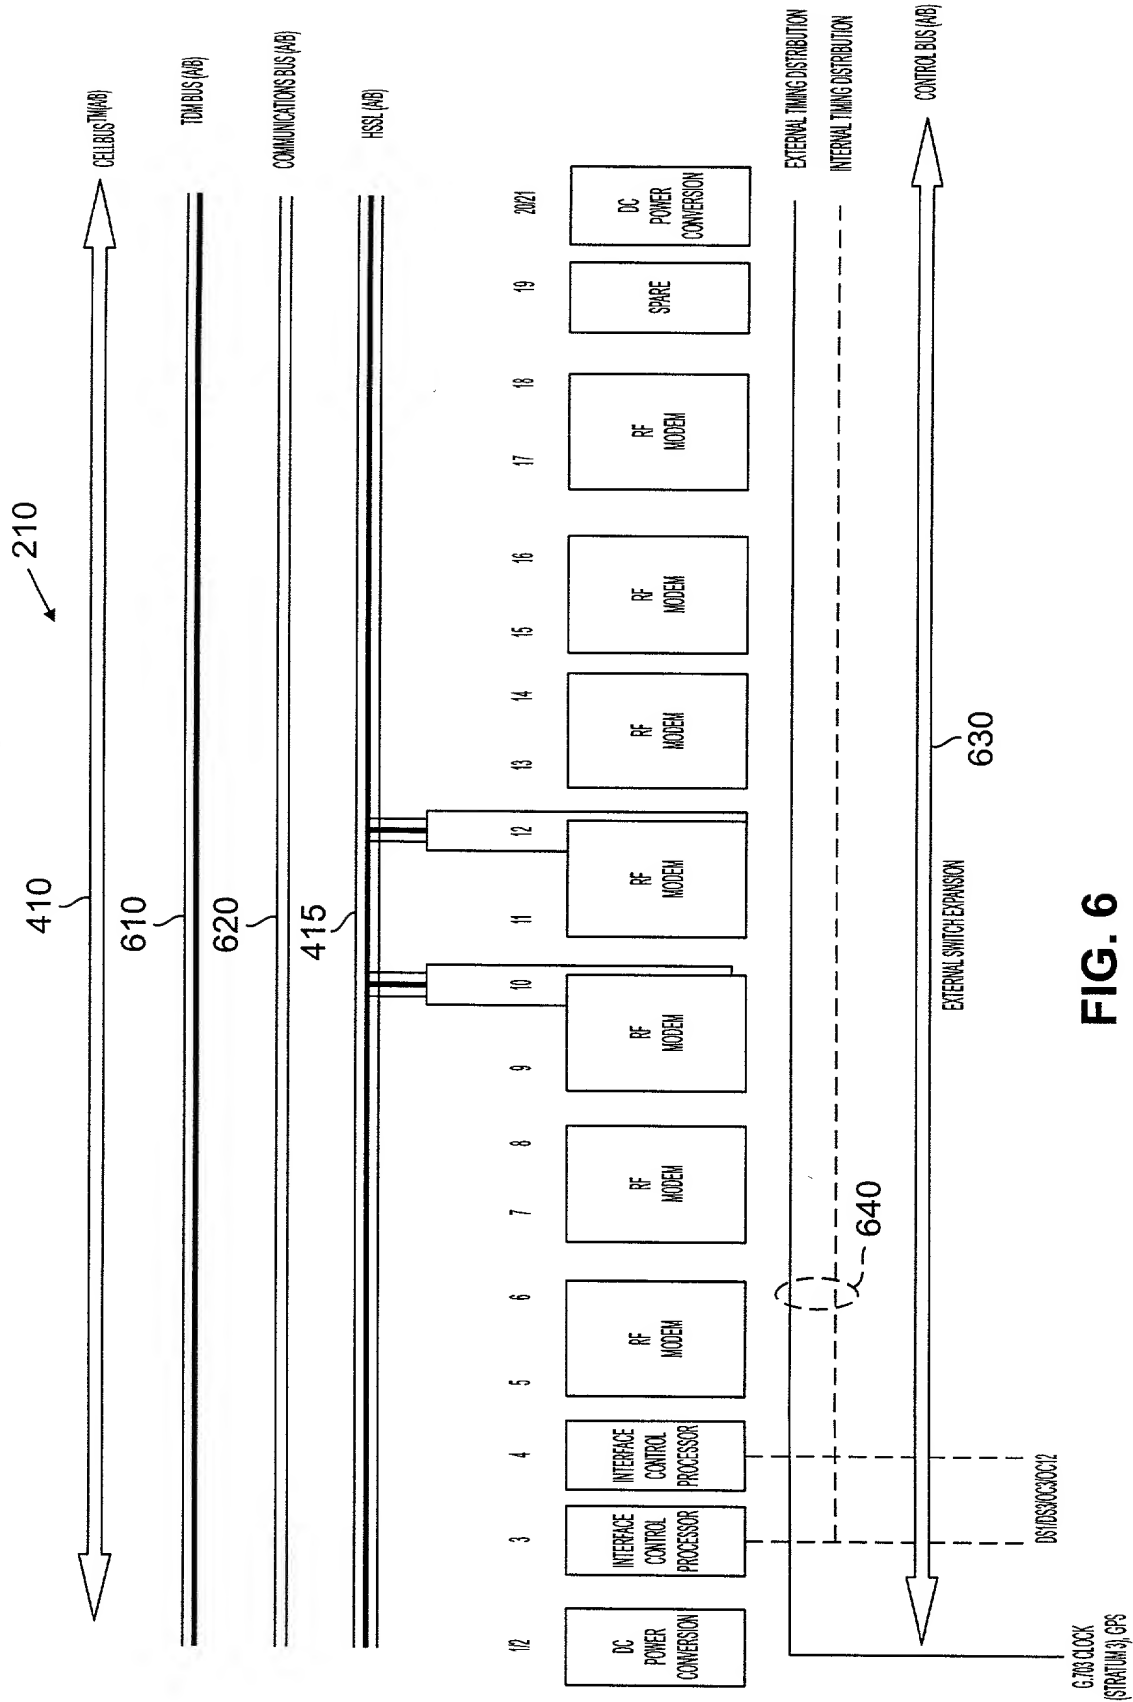


FIG. 6

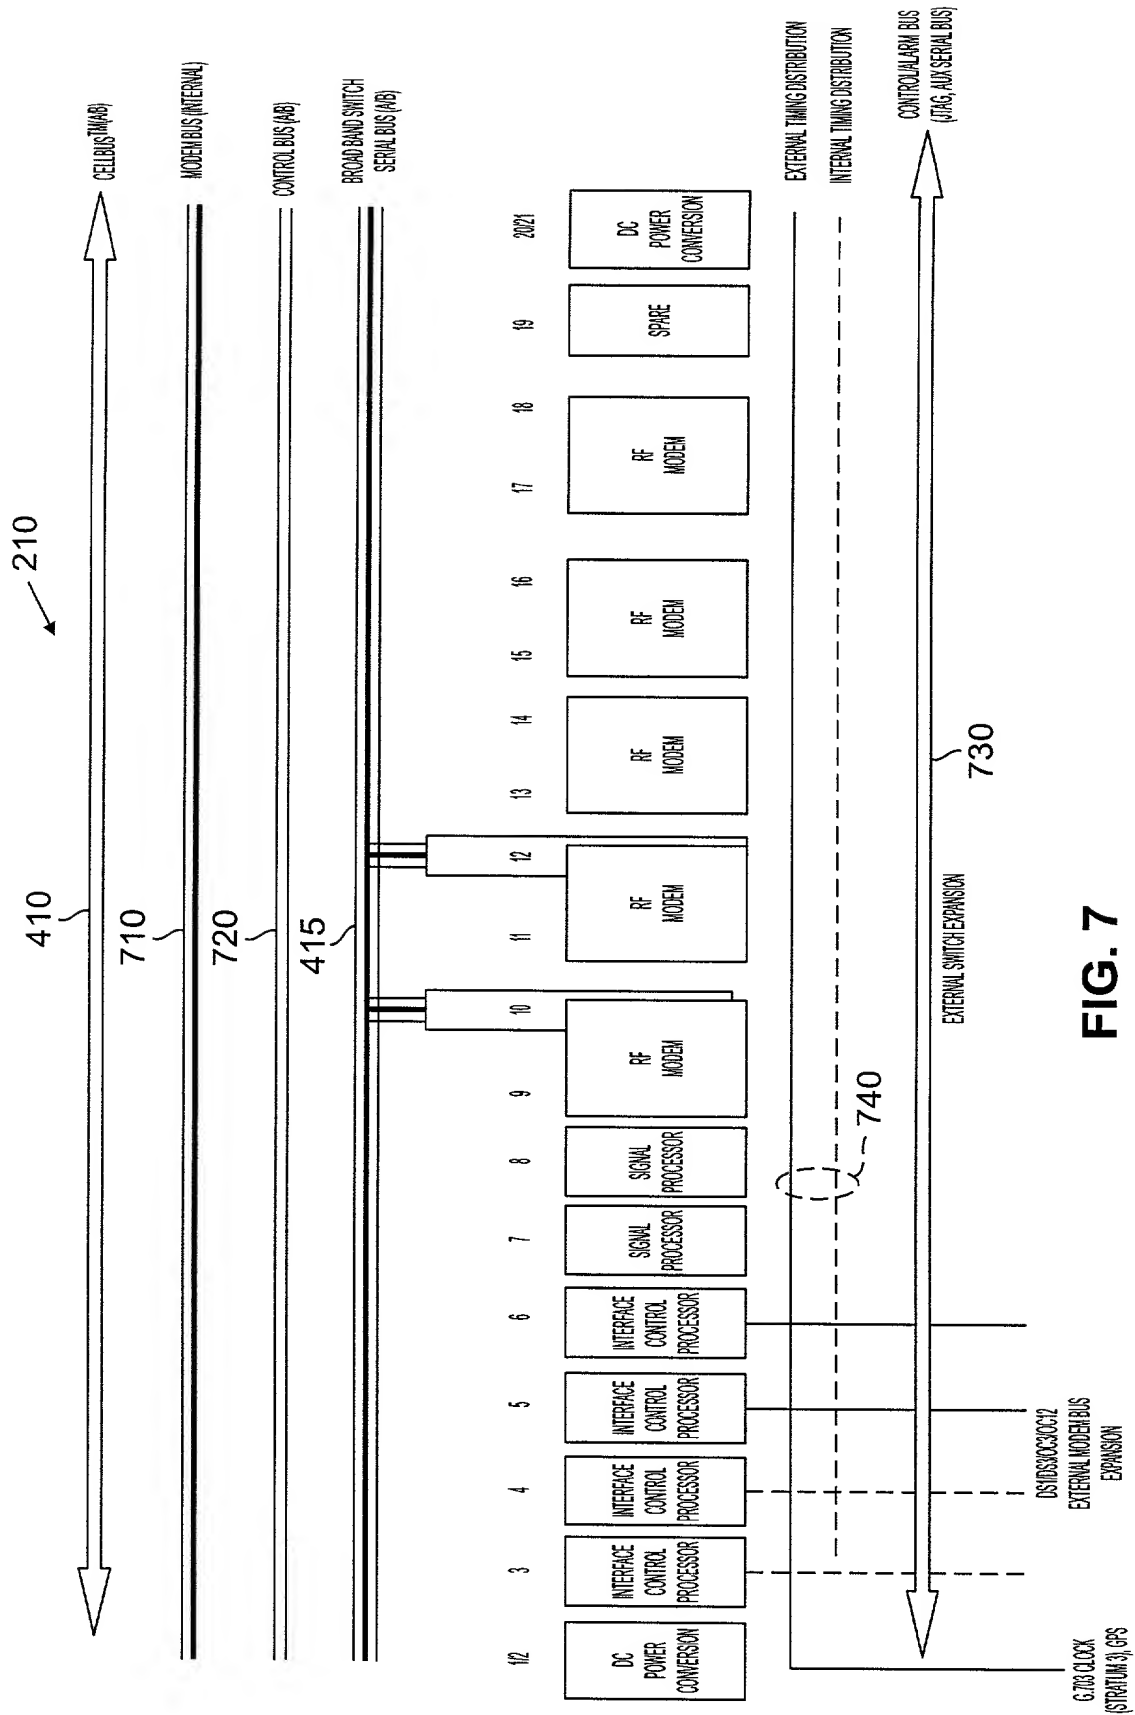


FIG. 7

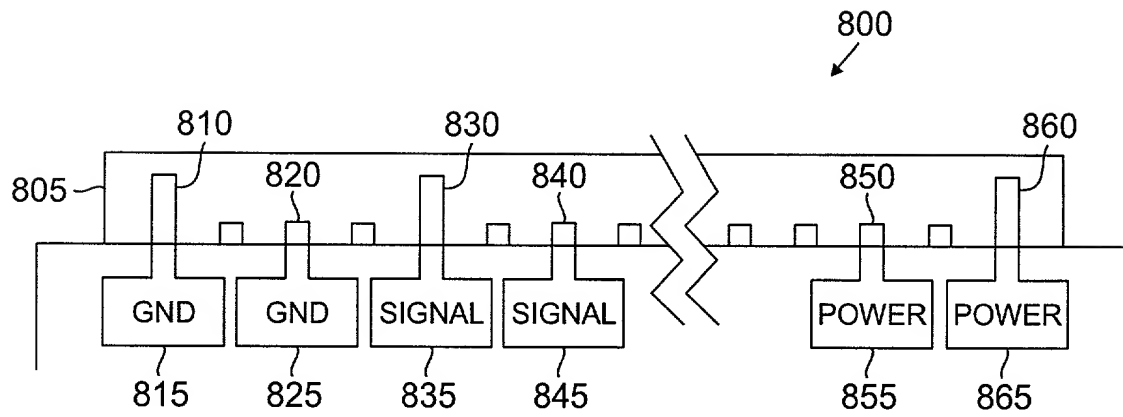


FIG. 8

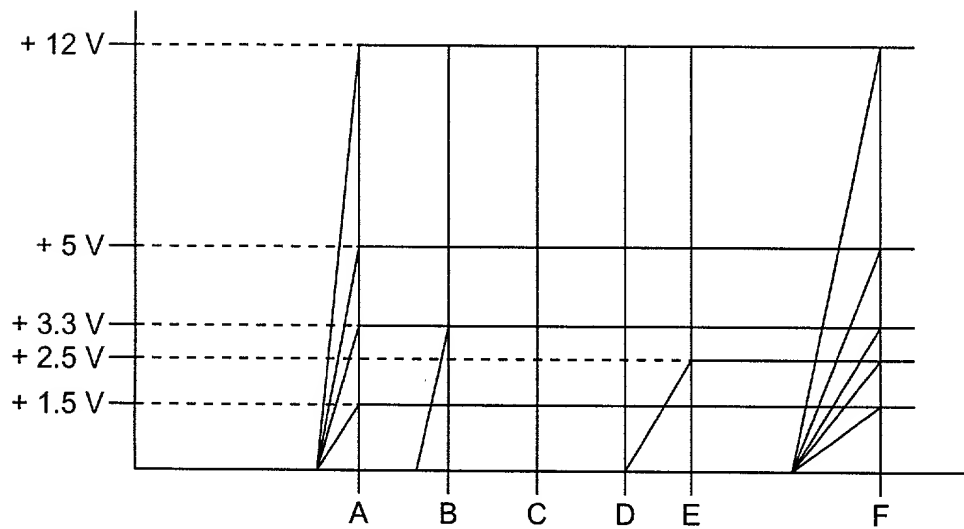


FIG. 9

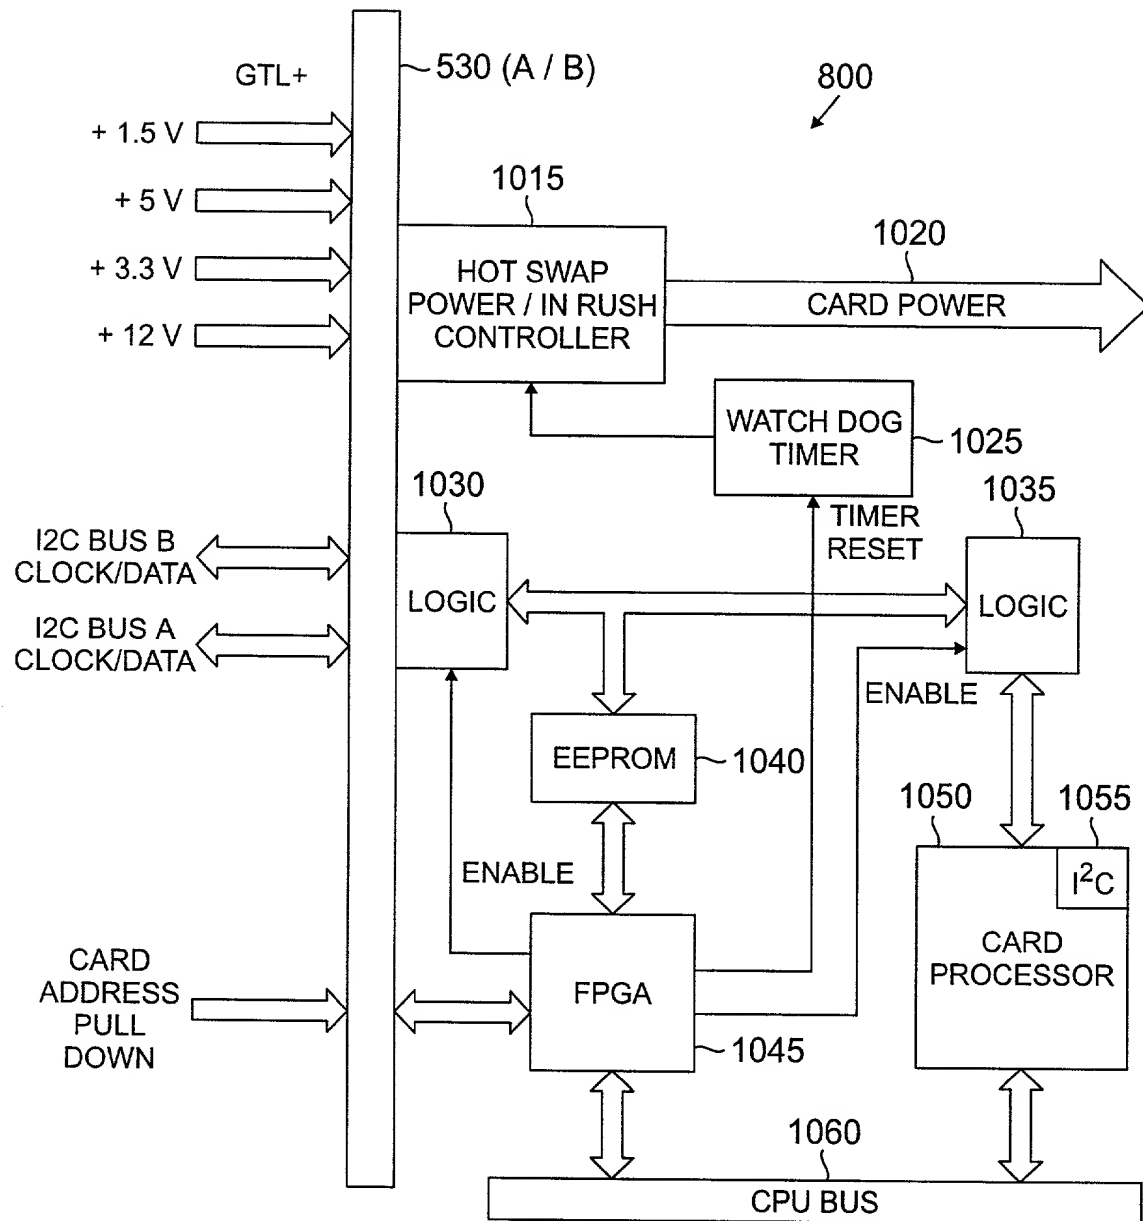


FIG. 10

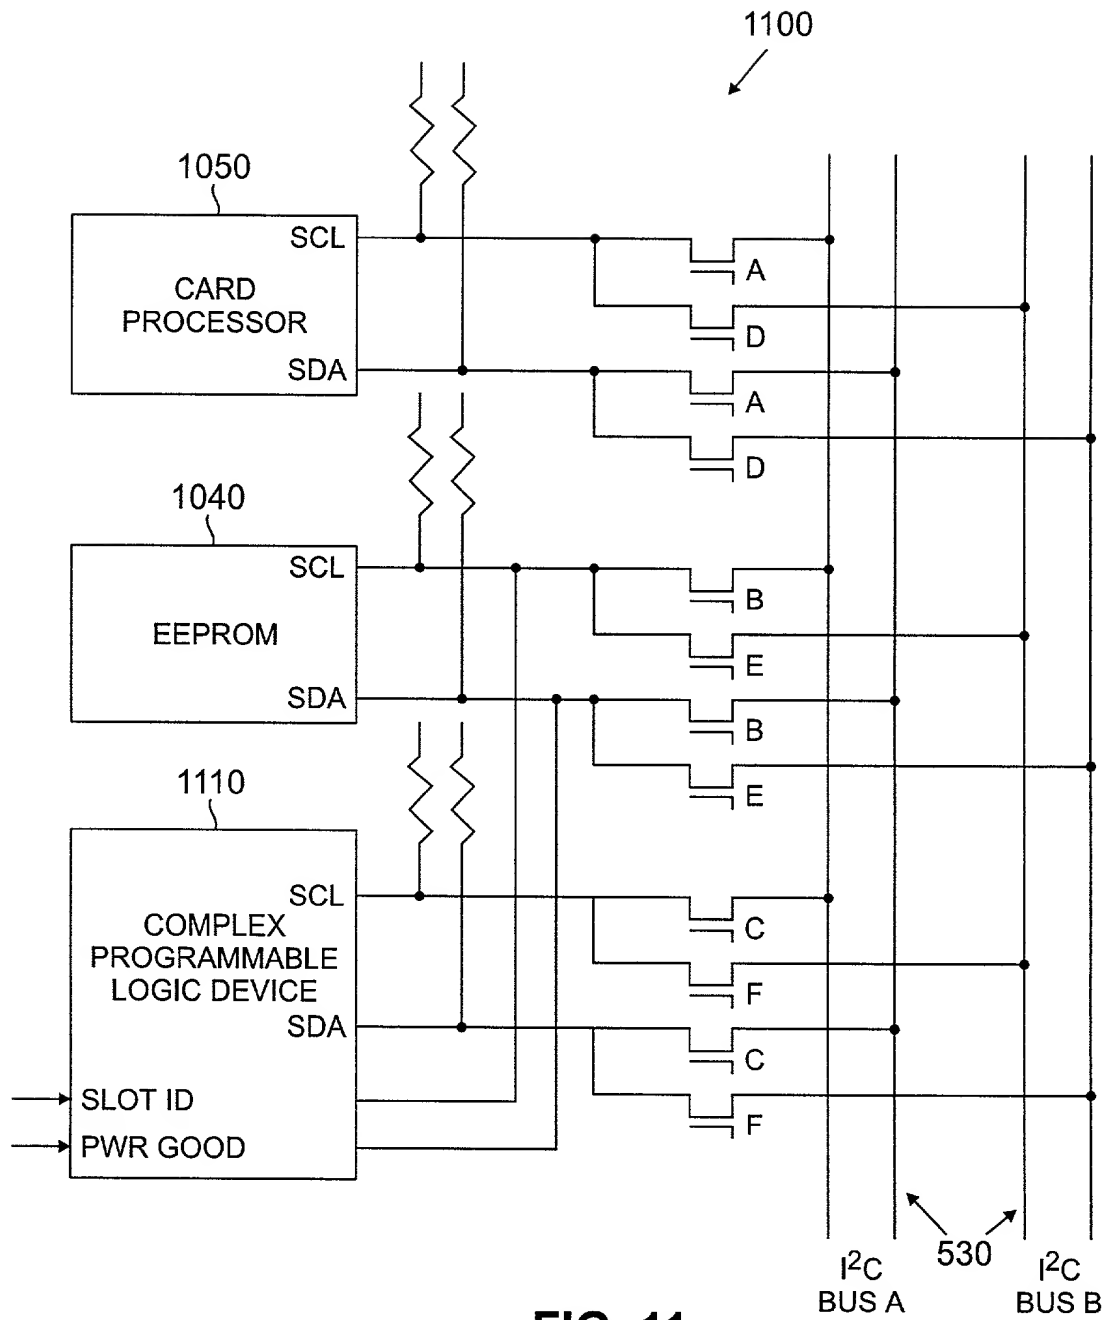


FIG. 11

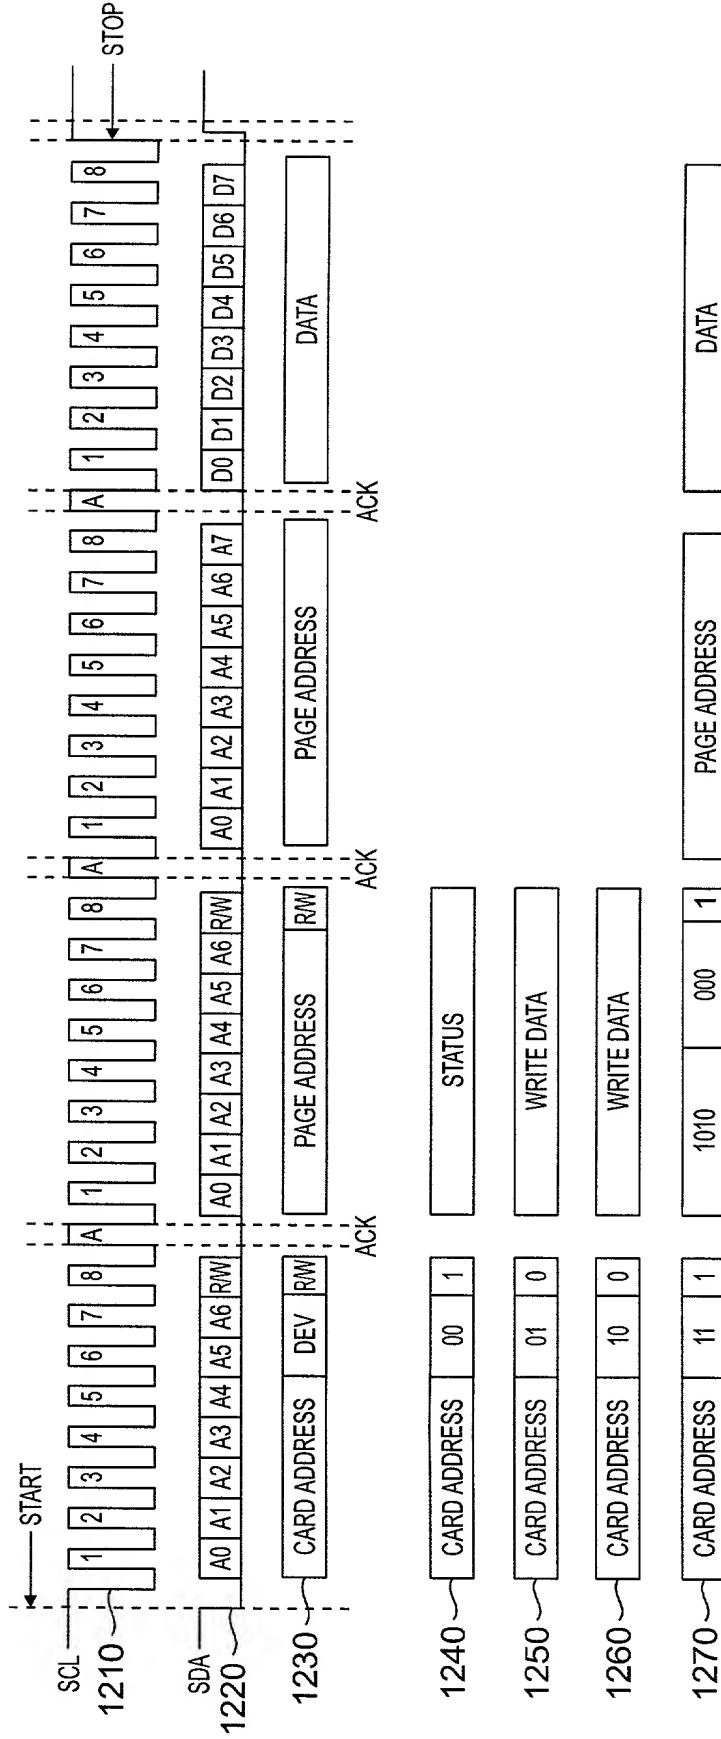


FIG. 12

1280	CARD ADDRESS = SLOT ID		DEV = 00 = CARD STATUS	
	RW = 1 = READ		DEV = 01 = CARD CONTROL	
	RW = 0 = WRITE		DEV = 10 = CARD PROCESSOR	
	DUPLICATED IN 1ST 2 BYTES		DEV = 11 = CARD EEPROM	

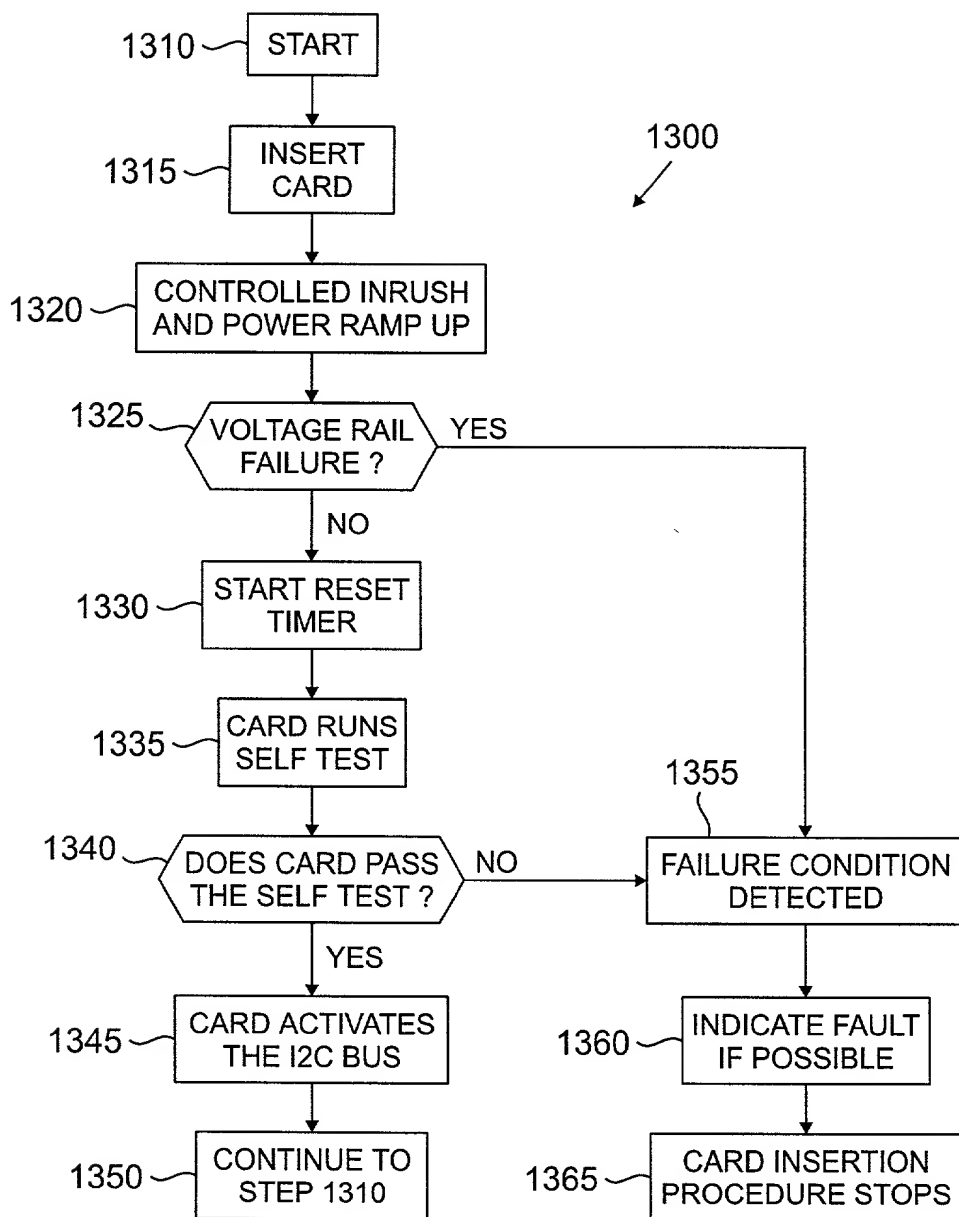


FIG. 13

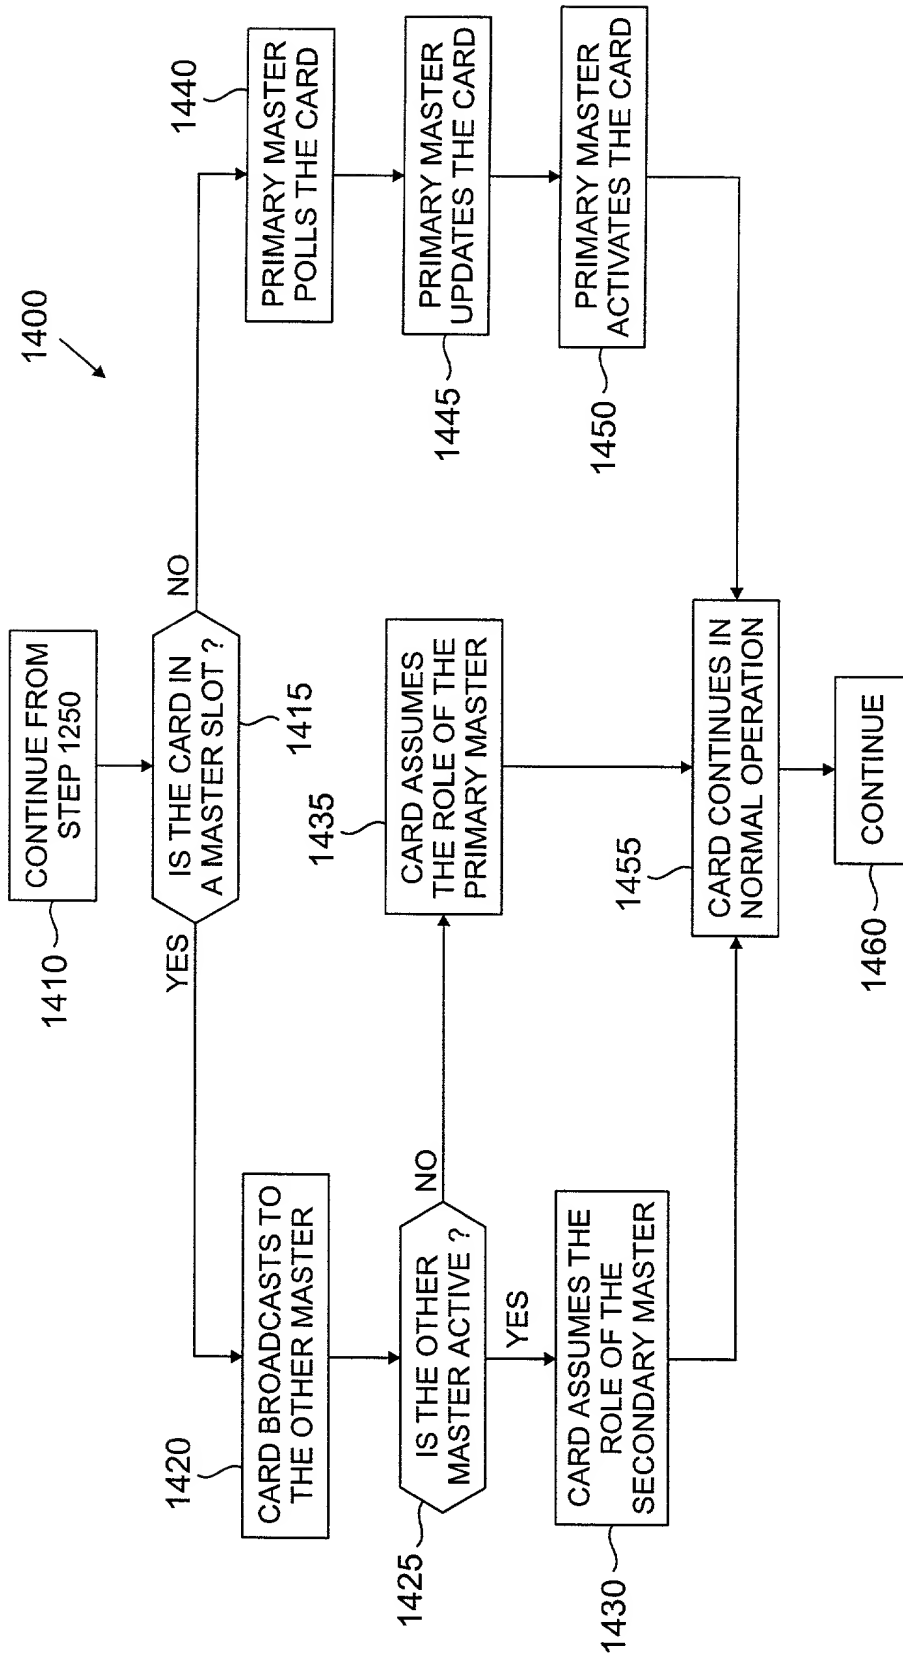


FIG. 14